


PICKET FENCE WITH ROTBOARD OPTION

GENERAL-
FENCE NOT TO EXCEED 6' FROM GROUND TO TOP OF PICKET
GROUND CONTACT TREATED POSTS CANNOT EXCEED 7' APART.
PICKETS-
PICKETS WILL BE 6' DOG-EAR CEDAR PICKETS WILL BE RIPPED
DOWN TO THE SPECIFIED LENGTH TO KEEP TOP OF PICKETS AT 6'
ABOVE GROUND
POSTS-
ALL POSTS MUST BE SET 24" BELOW GRADE
ALL POSTS WILL BE 4X4 GROUND CONTACT TREATED PINE
RAILS-
TOP RAIL WILL BE 2X4X16 TREATED PINE
WILL HAVE 3 RAILS TOTAL FOR STABILITY
MID & BOTTOM RAIL WILL HAVE 2X4X8 TREATED PINE
ROTBOARDS-
ROTBOARDS WILL HAVE 3 OPTIONS AND WILL BE FASTENED TO
EVERY BOTTOM RAIL AND POST


SIDE VIEW



FRONT VIEW

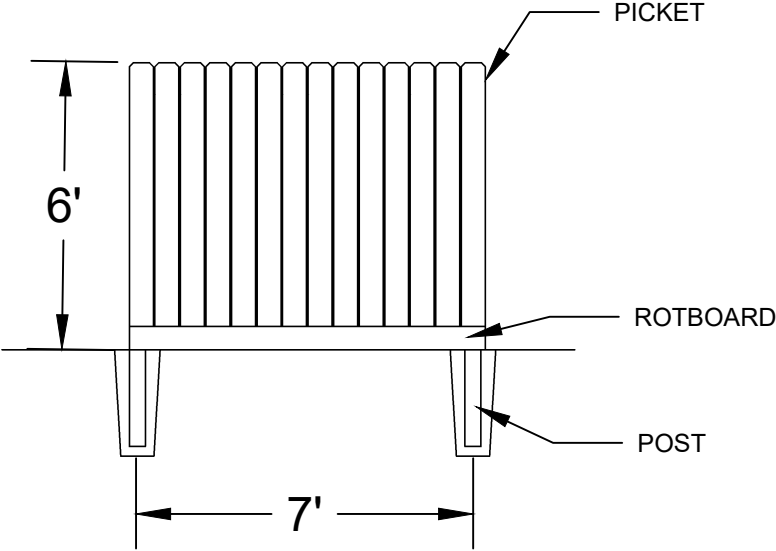

BACK VIEW

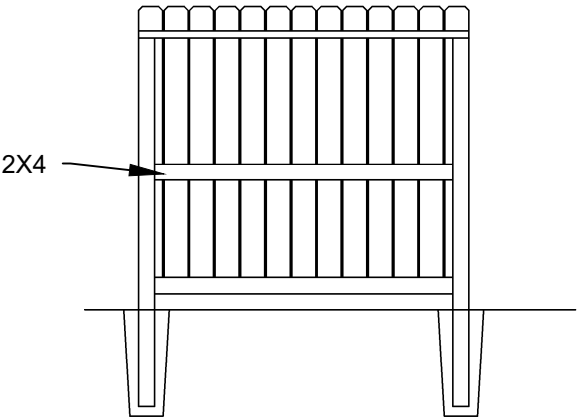

DRAWN BY: Joshua Austin

CHECKED BY: Charles Austin

NOTES:
SCALE: 1" = 4' 0"
SCALE FOR ALL DETAIL VIEWS ARE 1" = 2' 0"
THESE DRAWINGS ARE CONCEPTUAL AND ALL MEASUREMENTS MUST
BE FIELD VERIFIED

13726 FLORENCE RD. SUGARLAND, TX 77488

DRAWING TITLE:
PICKET FENCE WITH ROT BOARD

-003

43196-002

OWNER:

SILVER LAKE HOA
2715 SOUTHWYCK PARKWAY PEARLAND TX

A-

F-2